Proposed Amendment to the Water Quality Control Plan for the Los Angeles Region to revise the Ballona Creek Watershed Trash TMDL

Proposed for adoption by the California Regional Water Quality Control Board, Los Angeles Region on June 11, 2015.

Amendments:

7-3 Ballona Creek Trash TMDL	T
This TMDL was adopted by: The Regional Water Quality Control Board on September 19, 2001.	E
This TMDL was approved by: The State Water Resources Control Board on February 19, 2002. The Office of Administrative Law on July 18, 2002. The U.S. Environmental Protection Agency on August 1, 2002.	N T
The effective date of this TMDL is: August 28, 2002.	
This TMDL was revised by: The Regional Water Quality Control Board on March 4, 2004.	A
This revised TMDL was approved by: The State Water Resources Control Board on September 30, 2004. The Office of Administrative Law on February 8, 2005. [U.S. Environmental Protection Agency approval not required for amendment to implementation plan.]	I
This TMDL was again revised by: The Regional Water Quality Control Board on June 11, 2015.	V
This revised TMDL was approved by: The State Water Resources Control Board on [insert date]. The Office of Administrative Law on [insert date]. If applicable, the U.S. Environmental Protection Agency on [insert date].	E

The following table includes all of the elements of this TMDL.

Table 7-3.1 <u>Trash TMDL for Ballona Creek</u>: Trash TMDL Elements

Table 7-3.1 <u>Trash TMDL for</u> Ballona Creek: Trash TMDL Elements			
Element	Key Findings and Regulatory Provisions Derivation of Numbers		
Problem Statement	Ballona Creek and Wetland are included on the Clean Water Act Section 303(d) list of impaired waterbodies due to trash. This impairment was identified through an assessment of the waterbody relative to the water quality objectives applicable to trash, which include "Floating Material" and "Solid, Suspended, or Settleable Materials" in Chapter 3 of this Water Quality Control Plan for the Los Angeles Region. Trash in Ballona Creek, including Ballona Creek estuary, and Ballona Wetland is causing impairment of beneficial uses. The following designated beneficial uses are impacted by trash: water contact recreation (REC1); non-contact water recreation (REC2); warm freshwater habitat (WARM); wildlife habitat (WILD), estuarine habitat (EST); marine habitat (MAR); rare and threatened or endangered species (RARE); migration of aquatic organisms (MIGR); spawning, reproduction and early development of fish (SPWN); commercial and sport fishing (COMM); shellfish harvesting (SHELL); wetland habitat (WET); and cold freshwater habitat (COLD).		
Numeric Target	Zero trash in <u>Ballonathe Crivercreek and Wwetland</u> ¹ .		
(interpretation of the narrative water quality objective, used to calculate the waste load and load allocations)			
Source Analysis	Stormwater discharges are is the major source of trash in Ballona the rivereCreek Watershed.		
Loading Capacity	Zero.		
Waste Load Allocations	The TMDL requires pPhased reductions of trash over a period of 10 years, from existing baseline loads to zero. Baseline Waste Load Allocations (WLAs) for Phase I MS4 Permittees, including Caltrans, in the Ballona Creek Watershed are provided in Table 7-3.3. Current and future enrollees in Phase II MS4 permits (including educational institutions) also have a final WLA of zero. ²		
Load Allocations	The Load Allocations (LAs) for nonpoint source trash discharges to Ballona Creek and Wetlands, including the estuary, and its tributaries are zero. For nonpoint sources, zero trash is defined as no trash in the waters or parks, open space, or recreational facilities adjacent to Ballona Creek and Wetlands, including its estuary, and its tributaries, immediately following each assessment and collection event consistent with an established Minimum Frequency of Assessment and Collection Program (MFAC Program), described below in "Implementation".		

¹ The numeric target of zero was established in 2001.

² Phase II MS4 facilities designated in the Statewide Phase II Small MS4 General Permit within the Ballona Creek Watershed at the time of the 2015 revisions to this TMDL include: University of California, Los Angeles (main campus and various offsite facilities) and VA Greater Los Angeles Healthcare System.

Element	Key Findings and Regulatory Provisions Derivation of Numbers	
	MFAC Programs shall be established at intervals that prevent trash from accumulating in deleterious amounts that cause nuisance or adversely affect beneficial uses between collections.	
	LAs are assigned to the California Department of Fish and Wildlife for the Ballona Creek Wetlands. LAs may be assigned to additional entities that own and/or operate parks, open space, or recreational facilities adjacent to Ballona Creek, its estuary, or a tributary to the creek in the future under appropriate regulatory programs.	
Implementation	Point Sources	
	This TMDL Waste Load Allocations (WLAs) assigned to responsible agencies listed in Table 7-3.3 shall will be implemented through the Angeles County Municipal Separate Storm Sewer System (MS4) National Pollutant Discharge Elimination System (NPDES) Permit, at the State of California Department of Transportation (Caltrans) MS4 Permit. WLAs assigned to Phase II MS4 permittees shall be implemented through the Statewide Phase II Small MS4s General Permit or other regional MS4 permit issued to the Phase II MS4 dischargers. WLAs shall also be implemented stormwater permits via the authority vested in the Los Angeles Regional Water Board Executive Officer by sections 13267 and 13383 of the Porter-Cologn Water Quality Control Act (Water Code section 13000 et seq.).	
	(1) Compliance with the interim and final waste load allocation WLAs may be achieved through a full capture system. A full capture system (FCS) is any device or series of devices that traps all particles retained by a 5 mm mesh screen and has a design treatment capacity of not less than the peak flow rate (Q) resulting from a one-year, one-hour, storm in the subdrainage area.	
	The Rational Equation is used to compute the peak flow rate: Q = C × I × A, where Q = design flow rate (cubic feet per second, cfs); C = runoff coefficient (dimensionless); I = design rainfall intensity (inches per hour, as determined per the rainfall isohyetal map in Figure 7-3.A), and A= subdrainage area (acres).	
	The isohyetal map may be updated annually by the Los Angeles County hydrologist to reflect additional rain data gathered during the previous year. Annual updates published by the Los Angeles County Department of Public Works are prospectively incorporated by reference into this TMDL-and accompanying Basin Plan Amendment.	

Element	Key Findings and Regulatory Provisions Derivation of Numbers
	The Executive Officer has authority to certify, as full-capture, any trash reduction system that meets the operating and performance requirements as described above. ³
	Permittees that choose to comply using full capture systems must demonstrate a phased implementation of full capture systems over a 10-year period until the final WLA of zero is attained. The WLA of zero trash discharged shall be deemed achieved if FCS have been installed on all conveyances discharging to the waterbodies or installed to address all the drainage within the Permittee's drainage area to the Ballona Creek Watershed and the FCS are properly sized, operated, and maintained.
	Alternatively, in drainage areas where the vast majority of catch basins are retrofitted with FCS, the FCS are properly sized, operated, and maintained, and retrofit of the remaining catch basins is technically infeasible, responsible agencies may request that the Executive Officer make a determination that the agency is in full compliance with its final WLA if all of the following criteria are met:
	1) 98% of all catch basins -within the agency's jurisdictional land area in the watershed are retrofitted with FCS (or, alternatively, 98% of the jurisdiction's drainage area is addressed by FCS) and at least 97% of the catch basins (or, alternatively, drainage area) within the agency's jurisdiction in the subwatershed (the smaller of the HUC-12 equivalent area or tributary subwatershed) are retrofitted with FCS.
	2) The agency submits to the Regional Board a report for Executive Officer concurrence, detailing the technical infeasibility of FCS retrofits in the remaining catch basins and evaluating the feasibility of partial capture devices, and the potential to install FCS or partial capture devices along the storm drain or at the MS4 outfall downgradient from the catch basin.
	3) The agency submits to the Regional Board a report for Executive Officer approval, detailing the partial capture devices and/or institutional controls that are currently and will continue to be implemented in the affected subwatershed(s), including an assessment of the effectiveness of the partial capture devices and/or institutional controls using existing data and studies representative

T

³ The Regional Water Board currently recognizes nine *full capture systems*. These are: Vortex Separation Systems (VSS) and eight other Executive Officer-certified *full capture systems*, including specific types or designs of trash nets; two gross solids removal devices (GSRDs); catch basin brush inserts and mesh screens; vertical and horizontal trash capture screen inserts; a connector pipe screen device; and the nutrient separating baffle box. See August 3, 2004 Los Angeles Regional Water Quality Control Board Memorandum titled "Procedures and Requirements for Certification of a Best Management Practice for Trash Control as a Full Capture System.

Element <u>Key Findings and Regulatory Provisions Derivation of Nur</u>	
	of the subwatershed or jurisdictional area. If, based on Regional
	Board evaluation, existing data and studies are determined non-
	representative, responsible jurisdictions may also be required to
	conduct a special study of institutional controls and partial capture
	devices in the particular subwatershed(s) where the non-retrofitted
	catch basins are located.
	In addition, responsible jurisdictions shall re-evaluate the effectiveness
	of institutional controls and partial capture devices and report the
	findings to the Regional Board for confirmation or change to the
	determination, if significant land use changes occur in the affected
	subwatershed (based on permits for new and significant re-
	development) or if there is a significant change in the suite of
	implemented partial capture devices and/or institutional controls (e.g.,
	reduced frequency of implementation, reduced spatial coverage of
	implementation, change in technology employed). Such re-evaluation
	shall occur within one year of the identification of the significant
	changes.
	(2) Compliance with interim and final effluent limitations through the
	installation of partial capture devices and the application of institutional
	controls. Responsible jurisdictions employing partial capture devices or
	institutional controls shall use a mass balance approach based on the
	trash daily generation rate (DGR) ⁴ -, to demonstrate compliance.
	dust duity generation rate (2 ort), to demonstrate compitations
	The DGR shall be reassessed annually. Responsible jurisdictions may
	request a less frequent assessment of its DGR when the final WLA has
	been met (as described below) and the responsible jurisdiction
	continues to implement at the same level of effort partial capture
	devices and institutional controls. A return to annual DGR calculation
	shall be required for a period of years to be determined by the Executive
	Officer after significant land use changes.
	Responsible jurisdictions employing institutional controls or a
	combination of full capture systems, partial capture devices, and
	institutional controls shall be deemed in compliance with the final
	WLAs when the reduction of trash from the jurisdiction's baseline load,
	in Table 7-3.3, is between 99% and 100% as calculated using a mass
	balance approach, and the FCS and partial capture devices are properly
	sized, operated, and maintained.
	sized, operaced, and maintained.
	Alternatively, responsible jurisdictions may request that the Executive
	Officer make a determination that a 97% to 98% reduction of the
	baseline load as calculated using a mass balance approach, constitutes
	full compliance with the final WLA if all of the following criteria are
	met:
	1) The agency submits to the Regional Board a report for Executive

⁴ The DGR is the average amount of trash deposited during a 24-hour period, as measured in a specified drainage area.

T

N

 Γ

A

Г

V

Ł

Element	Key Findings and Regulatory Provisions Derivation of Numbers
	Officer approval, including, two or more consecutive years of data
	showing that the Permittee's compliance was at or above a 97%
	reduction in its baseline trash load; an evaluation of institutional
	controls in the jurisdiction demonstrating continued effectiveness
	and any potential enhancements; and demonstration that
	opportunities to implement partial capture devices have been fully
	exploited.
	(3) Compliance with the interim and final WLAs through a
	scientifically based alternative compliance approach approved by the
	Regional Board.
	Responsible jurisdictions employing an alternative compliance
	approach shall conduct studies of institutional controls and partial
	capture devices for their particular subwatershed(s) or demonstrate that
	existing studies are representative and transferable to the implementing
	area for Executive Officer approval. Responsible jurisdictions shall
	also provide a schedule for periodic, compliance effectiveness
	demonstration and evaluation. FCS and partial capture devices shall be
	properly sized, operated, and maintained consistent with sizing,
	
	operation, and maintenance schedules used to determine their
	<u>effectiveness.</u>
	The Los Angeles County MS4 and Caltrans MS4 Permittees employing
	alternative compliance options for FCS, partial capture devices, and the
	application of institutional controls, or employing a scientifically based
	alternative compliance approach shall submit a revised Watershed
	Management Program or Enhanced Watershed Management Program,
	or separate TMDL implementation plan, for Executive Officer approval
	prior to use of these alternative compliance options.
	An implementation schedule for Phase II MS4 permittees will be
	established during the issuance, reissuance, or reopening of their
	respective permit(s) to incorporate provisions consistent with the
	assumptions and requirements of these WLAs or upon designation by
	the State or Regional Water Board as a Phase II MS4 permittee and
	enrollment in the Statewide Phase II Small MS4s General NPDES
	Permit.
	The Los Angeles County Flood Control District (LACFCD) is not
	assigned a Waste Load Allocation, since Waste Load Allocations are
	based on jurisdictional area. However, the LACFCD is responsible for
	performing storm drain operation and maintenance, including: catch
	basin inspection and cleaning; open channel maintenance that includes
	removal of trash and debris; and implementation of activity specific
	BMPs, including those related to litter/debris/graffiti in compliance
	with its MS4 permit. The LACFCD may be held responsible with a
	jurisdiction and/or agency for non-compliance with Waste Load Allocations where it has either:
	Allocations where it has either.

Element	Key Findings and Regulatory Provisions Derivation of Numbers
	(i) without good cause denied entitlements or other necessary authority to a responsible jurisdiction or agency for the timely installation and/or maintenance of full and/or partial capture trash control devices for purposes of TMDL compliance in parts of the MS4 physical infrastructure that are under its authority, or (ii) not fulfilled its obligations regarding proper BMP installation, operation, and maintenance for purposes of TMDL compliance within the MS4 physical infrastructure under its authority,
	thereby causing or contributing to a responsible jurisdiction and/or agency to be out of compliance with its interim or final Waste Load Allocations.
	Under these circumstances, the LACFCD's responsibility shall be limited to non-compliance related to the drainage area(s) within the jurisdiction where the LACFCD has authority over the relevant portions of the MS4 physical infrastructure.
	Nonpoint Sources
	Load Allocations (LAs) shall be implemented consistent with the Statewide Policy for Implementation and Enforcement of the Nonpoint Source Pollution Control Program through a general waiver of waste discharge requirements (WDRs), individual waivers of WDRs, general WDRs, individual WDRs, a memorandum of understanding (MOU), a cleanup and abatement order, or any other appropriate regulatory order(s). LAs may be achieved through a program of minimum frequency of assessment and collection (MFAC). Responsible jurisdictions assigned LAs shall be deemed in compliance with the LAs if an MFAC/BMP program, approved by the Executive Officer, demonstrates that there is no accumulation of trash, as defined in "Load Allocations" above. Responsible entities assigned LAs shall also comply with the implementation schedule listed in Table 7-3.4.
	An MFAC/BMP Program shall include the following criteria: 1) The MFAC/BMP Program shall include an initial minimum frequency of trash assessment and collection and a suite of structural and/or nonstructural BMPs. The MFAC/BMP program shall include collection and disposal of all trash found in the source areas and along the Los Angeles River and its tributaries. Responsible entities shall implement an initial suite of BMPs based on current trash management practices in land areas that are found to be nonpoint sources of trash to the Los Angeles River and its tributaries.
	The initial minimum frequency shall be as follows: a) Trash in open space and parks managed by responsible

Element	Key Findings and Regulatory Provisions Derivation of Numbers	
	jurisdictions and agencies identified in the LA section of this table shall be 100% removed at each assessment and collection event as specified in the Trash Monitoring and Reporting Plan (TMRP), within 72 hours after critical conditions, and immediately after special events when no safety hazards exist. b) The TMRP shall include protocols for trash assessment immediately after each collection event, assessment locations,	
	and frequencies. c) Compliance for entities responsible for open space and parks is determined by the following criteria: i) The assessment performed immediately after each collection event shall demonstrate that no trash	
	ii) The trash amount accumulated between collection events in open space and parks shall not exceed the LAs of 640 gallons per square mile per year (gal/mi²/yr) and shall show a decreasing trend. iii) Responsible entities shall increase the frequency of collection and/or implement additional BMPs, should	
	trash amounts collected at collection events not indicate a decreasing trend. 2) The MFAC/BMP Program shall include assurances that it will be implemented by the responsible entities.	
	 3) MFAC protocols may be based on SWAMP protocols for rapid trash assessment, or alternative protocols proposed by dischargers and approved by the Executive Officer. 4) Implementation of the MFAC/BMP program shall include a Health and Safety Plan to protect personnel. The MFAC/BMP shall not 	
Margin of Safety	"Zero discharge" is a conservative standard which that contains an implicit margin of safety.	
Seasonal Variations and Critical Conditions	Discharge of trash from the MS4storm drain occurs primarily during or shortly after a rain event of greater than 0.25 inches.	
<u>Monitoring</u>	Los Angeles County MS4 Permittees and Caltrans shall propose and implement a Trash Monitoring and Reporting Plan (TMRP) for Executive Officer approval. The Regional Board's Executive Officer will have full authority to review, to modify, to select alternate monitoring sites, and to approve or disapprove of the monitoring plans.	

Element	Key Findings and Regulatory Provisions Derivation of Numbers
	Responsible entities can report receiving water monitoring through a
	separate TMRP annual report or in conjunction with annual reporting
	under MS4 permits.
	Receiving water monitoring shall be consistent with prescribed
	elements listed in the Surface Water Ambient Monitoring Program's
	Rapid Trash Assessment.
	Monitoring Plan: Responsible entities will submit a TMRP with the
	proposed receiving monitoring sites and at least two additional alternate
	monitoring locations. The TMRP must include maps of the MS4
	infrastructure, including catch basins, storm drains and outfalls relative
	to receiving waters, and locations where trash accumulates in the
	waterbody. Trash monitoring shall focus on visible trash at
	representative and critical locations. Locations for trash assessment
	shall include, but not be limited to, locations where trash enters and
	exits each reach/segment and their tributaries.
	Sampling Site and Frequency: The TMRP shall detail the monitoring
	frequency and number and location of sites, including at least one
	monitoring station per reach and tributary. Each sampling evaluation
	should consider trash levels over time and under different seasonal
	conditions. Sampling assessment every year shall be repeated at the
	same site where trash was collected during previous assessment to
	determine trash accumulation rates. Responsible entities should
	consider trash assessment before and after community clean up events.
	Los Angeles County MS4 Permittees and Caltrans shall submit a
	revised Integrated Monitoring Program or Coordinated Integrated
	Monitoring Program incorporating the TMRP requirements or a stand-
	alone TMRP for Executive Officer approval six months after the
	effective date of the TMDL.
	MFAC Monitoring
	Responsible entities assigned LAs, shall prepare a TMRP for the
	MFAC/BMP Program, and responsible entities shall self-report any
	non-compliance with its provisions. The results of the MFAC/BMP
	Program including, but not limited to, frequency of trash collections,
	amount of trash collected, trash assessments, and calculation of
	reduction from baseline load allocations shall be submitted to the
	Regional Board on an annual basis.

 \mathbf{T}

 \mathbf{E}

^{*}The complete administrative record for the TMDL is available for review upon request.


Figure <u>7-3.</u>A

Isohyethal Map of Rainfall Intensities in Portions of Los Angeles County

1-Year 30-Min Rainfall Intensity (Inches/Hour)

 \mathbf{T}

E

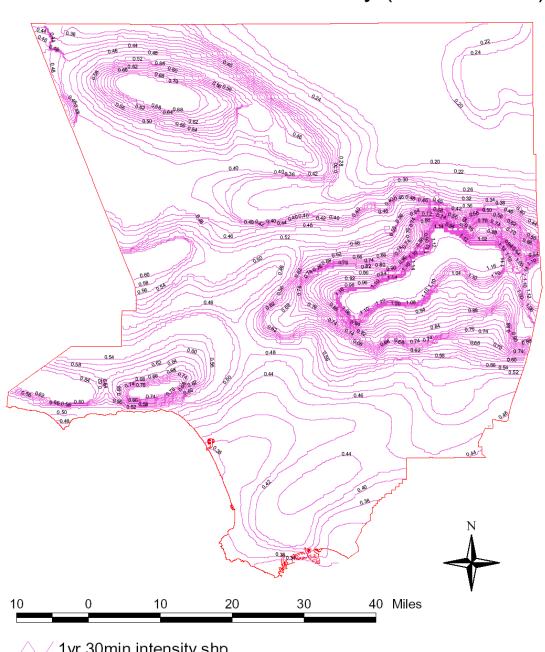

1yr 30min intensity.shp
La county boundary.shp

Table 7-3.2 Ballona Creek <u>Watershed</u> Trash TMDL: Implementation Schedule.⁵ (<u>Baseline Default Wwaste Lload Aallocations expressed as cubic feet of uncompressed trash and % reduction.)</u>

redi	reduction.)			
Year	Baseline	Waste Load Allocation	Compliance Point	
	Monitoring/			
	Implementation			
1	Baseline Monitoring	No allocation specified. Trash will be	Achieved through timely compliance	
10/1/01		reduced by levels collected during the	with baseline monitoring program.	
9/30/02		baseline monitoring program.		
2	Baseline Monitoring	No allocation specified. Trash will be	Achieved through timely compliance	
10/1/02		reduced by levels collected during the	with baseline monitoring program.	
9/30/03		baseline monitoring program.		
3	Baseline Monitoring	90% (9,985 for the Municipal	No compliance point (target of 90%)	
10/1/03	(optional)/	permittees; 1,472 for Caltrans)		
9/30/04	Implementation:			
	Year 1			
4	Baseline Monitoring	80% (8,875 for the Municipal	No compliance point (target of 80%)	
10/1/04	(optional)/	permittees; 1,308 for Caltrans)		
9/30/05	Implementation:			
	Year 2			
5	Implementation:	70% (7,776 for the Municipal	Compliance is 80% of the baseline	
10/1/05	Year 3	permittees; 1,146 for Caltrans)	load, calculated as a rolling 3-year	
9/30/06			annual average (8,875 for the	
			Municipal permittees; 1,308 for	
			Caltrans).	
6	Implementation:	60% (6,656 for the Municipal	70% of the baseline load-the baseline	
10/1/06	Year 4	permittees; 981 for Caltrans)	load, calculated as a rolling 3-year	
9/30/07			annual average (7,776 for the	
			Municipal permittees; 1,146 for	
			Caltrans).	
7	Implementation:	50% (5,547 for the Municipal	60% of the baseline load, calculated as	
10/1/07	Year 56	permittees; 818 for Caltrans)	a rolling 3-year annual average (6,656	
9/30/08			for the Municipal permittees; 981 for	
			Caltrans)	
8	Implementation:	40% (4,438 for the Municipal	50% of the baseline load, calculated as	
10/1/08	Year 6	permittees; 654 for Caltrans)	a rolling 3-year annual average (5,547	
9/30/09			for the Municipal permittees; 818 for	
2.20,02			Caltrans).	
9	Implementation:	30% (3,328 for the Municipal	40% of the baseline load, calculated as	
10/1/09	Year 7	permittees; 491 for Caltrans)	a rolling 3-year annual average (4,438	
9/30/10	,	l state, we are summer,	for the Municipal permittees; 654 for	
2,20,10			Caltrans).	
10	Implementation:	20% (2,218 for the Municipal	30% of the baseline load, calculated as	
10/1/10	Year 8	permittees; 327 for Caltrans).	a rolling 3-year annual average (3,328	
10/1/10	12010	permittees, 527 for Cardans).	a roming 5 jour annuar average (5,520	

⁵ "Notwithstanding the zero trash target and the <u>baselinedefault Wwaste Lload Aallocations</u> shown in Table 7-3.2, a Permittee will be deemed in compliance with the Trash TMDL in areas served by a Full Capture System within the Ballona Creek <u>and Estuary</u> Watershed."

⁶ The Regional Board will-review and reconsider the final Waste Load Allocations once a reduction of 50% has been achieved and sustained.

9/30/11			for the Municipal permittees; 491 for
			Caltrans).
11	Implementation:	10% (1,110 for the Municipal	20% of the baseline load, calculated as
10/1/11	Year 9	permittees;	a rolling 3-year annual average (2,220
9/30/12		164 for Caltrans).	for the Municipal permittees; 327 for
			Caltrans).
12	Implementation:	0 or 0 % of the baseline load.	10% of the baseline load, calculated as
10/1/12	Year 10		a rolling 3-year annual average (1,110
9/30/13			for the Municipal permittees; 164 for
			Caltrans.
13	Implementation:	0 or 0 % of the baseline load.	3.3-% of the baseline load, calculated
10/1/13	Year 11		as a rolling 3-year annual average (366
9/30/14			for the Municipal permittees, 54 for
			Caltrans).
14	Implementation:	0 or 0 % of the baseline.	0 or 0 % of the baseline load.
10/1/14	Year 12		
9/30/15			

T

E

N

 \mathbf{T}

 \mathbf{A}

T

V

H

Table 7-3.3. Ballona Creek Trash TMDL: Significant Dates

30 days after receipt of the Executive Officer's	Submit baseline monitoring plan(s).
request as authorized by Section 13267 of the	
Water Code.	
120 days after receipt of the Executive Officer's	List of facilities that are outside of the
request as authorized by Section 13267 of the	permittee's jurisdiction but drain to a portion of
Water Code.	the permittee's storm drain system, which
	discharges to Ballona Creek.
Within the first 2 years after approval of this	Collection of baseline data.
basin plan amendment; to be extended to 4	
years at the option of the permittees	
72 hours after each rain event	Clean out of and measurement of trash
	retained.
Every 3 months during dry weather	Clean out of and measurement of trash
	retained.

<u>Table 7-3.3.</u> Ballona Creek Watershed Trash TMDL Baseline Waste Load Allocations (gallons and lbs of trash).

Responsible Entity	WLA (gals)	WLA (lbs)
City of Beverly Hills	<u>45,336</u>	<u>70,712</u>
City of Culver City	<u>25,081</u>	<u>37,271</u>
City of Inglewood	<u>14,717</u>	<u>22,324</u>
City of Los Angeles	602,068	942,720
County of Los Angeles	<u>32,679</u>	<u>52,693</u>
City of Santa Monica	<u>1,749</u>	<u>2,579</u>
City of West Hollywood	<u>9,360</u>	13,411
<u>Caltrans</u>	<u>12,222</u>	<u>13,688</u>

<u>Table 7-3.4 Ballona Creek Trash TMDL: Nonpoint Source Implementation Schedule</u>

T E N T A

Task No.	<u>Task</u>	<u>Date</u>
1	Baseline Load Allocations in Effect	Effective date of the reconsideration of the Ballona Creek Trash TMDL
2	Submit Minimum Frequency Assessment and Collection (MFAC) Program Plan	Upon enrollment in Conditional Waiver of WDR for trash
<u>3</u>	Achieve 100% reduction of trash from baseline load allocations	Three years from effective date of the reconsideration of the Ballona Creek Trash TMDL

T

E

N

T

A

T

I

V

H